

Flex™

Thermoplastic Single Ply and Multi-Ply
Roofing & Waterproofing Systems



ALUMINATOR

Features

- All-Aluminum
 - Made from Spun Aluminum for Quick Installation & Long-Term Durability. Flange is 16" & the Outlet is 12" Long
- New & Improved Aluminum Dome
 - Increased Height for Better Drainage - the New Dome Stands 7" Tall & 10" in Diameter, allowing for Improved Water Flow & Debris Clearance
- Heavy-Duty Aluminum Ring
 - Features a 1-1/4" Tall Aluminum Ring with 12 Scallops to Optimize Drainage & Water Flow
- ProSeal Rubber Seal
 - Standard with ProSeal Rubber Seal, Offering a Watertight Connection & Preventing Water Backup Under the Membrane
- Larger Stud Diameter
 - Larger Stud Diameter for Increased Strength & Enhanced Hardware Stability




Engineered for performance and built to last, the Aluminator is the ultimate retrofit roof drain designed to handle demanding commercial roofing environments. Crafted from heavy-duty spun aluminum, the Aluminator offers incredible durability, making it the smart choice for distributors, contractors and building owners alike. Featuring the Proseal mechanical seal that creates a watertight barrier inside the existing drain pipe to prevent water backup from reaching the roof membrane. Installs quickly with compression bolts — no adhesives required — for a secure, long-lasting fit, even in aged or irregular piping. Paired with the heavy-duty aluminum dome and clamp ring, it protects against debris and ensures consistent water flow. The Aluminator delivers reliable drainage with a professional-grade finish.

Precision Details

Part Numbers	Drain Size	Fits into Pipe ID
BALUM2CR	2"	1-3/4" - 2 1/4"
BALUM3CRP	3"	2-7/8" - 3-1/4"
BALUM4CRP	4"	3-7/8" - 4-1/4"
BALUM5CRP	5"	4-7/8" - 5-1/4"
BALUM6CRP	6"	5-7/8" - 6-1/4"
BALUM8CRPM	8"	7 7/8" - 8 1/4"
BALUM10CRP	10"	9 3/4" - 10 1/4"
Non-Standard		
BALUM200CRS	2.5"	2 1/4--2 5/8
BALUM300CRS	3.5"	3 1/4--3 5/8
BALUM400CRS	4.5"	4 1/4--4 5/8

Please Note: 2", 10" and all Non-Standard Sizes will have a Tape Seal.

Due to variations in manufacturing and job site inconsistencies the data are guidelines only and are not guaranteed for any specific situations.

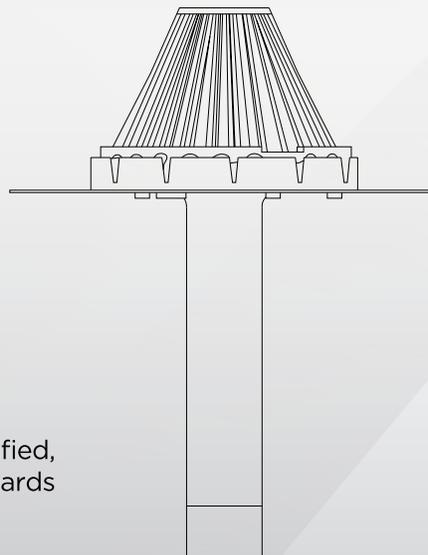

Distributed By:

Flex™

5103A Pottsville Pike
Reading, PA 19605
P: 610.916.9500
F: 610.916.9501

Scan to Visit Website



FlexRoofingSystems.com



The 3", 4", 5", and 6" sizes are QAI certified, ensuring compliance with industry standards for quality and performance.